



Living with art

Gvt matt  
**600X1200MM**

# Introduction

Strategically located at the ceramic hub of India-Morbi(Gujarat), Vitrified Pvt. Ltd. is affianced in offering a quality range of vitrified tiles in a variety of textures, designs, patterns and styles to meet the altering requirements of clientele. Since a decade, the brand has endeavored to embellish homes with delight, liveliness and dynamism reverberating with the quality, potency and life of its product-line.

Vitrified has been established with the aim of offering the finest vitrified tiles in the industry, at reasonable rates. We have highly skilled and experienced professionals involved who ensure that the customers get the top rated products, exceeding their expectations. We emphasize on delivering best quality product and unparalleled service. All are backed with a complete technical support program.



Choose your living chunk



Comfort  
with  
living life



# Matt


SERIES

Eye-catching looks for an elegantly complex design.  
A homage to a material with significant history,  
reinvented with a decidedly contemporary feel, which  
leaves its mark indelibly, bringing style to the most  
varied and demanding contemporary design  
settings.

GVT  
**600X1200MM**




BOSTON BEIGE

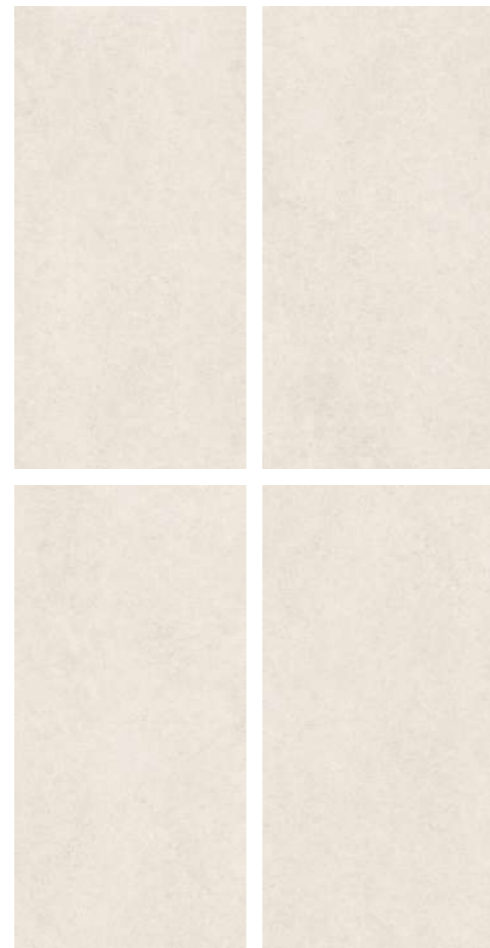

RANDOM- 04



BOSTON BROWN

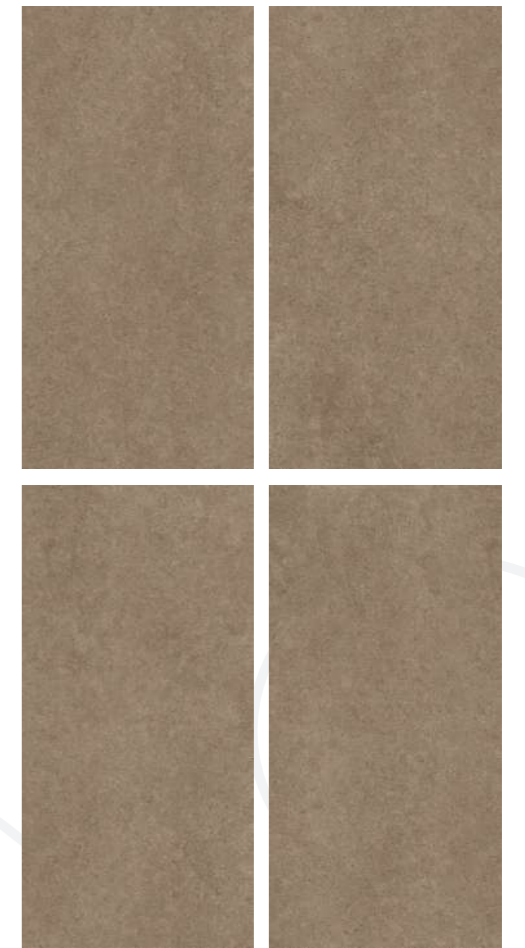

RANDOM- 04


GVT 600X1200MM

BOSTON BROWN






BOSTON GREY

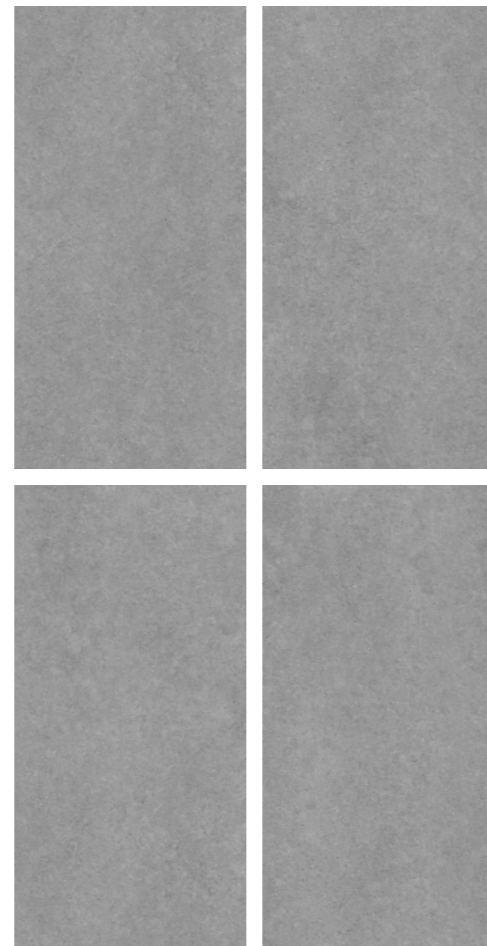

RANDOM- 04



BOSTON BIANCO

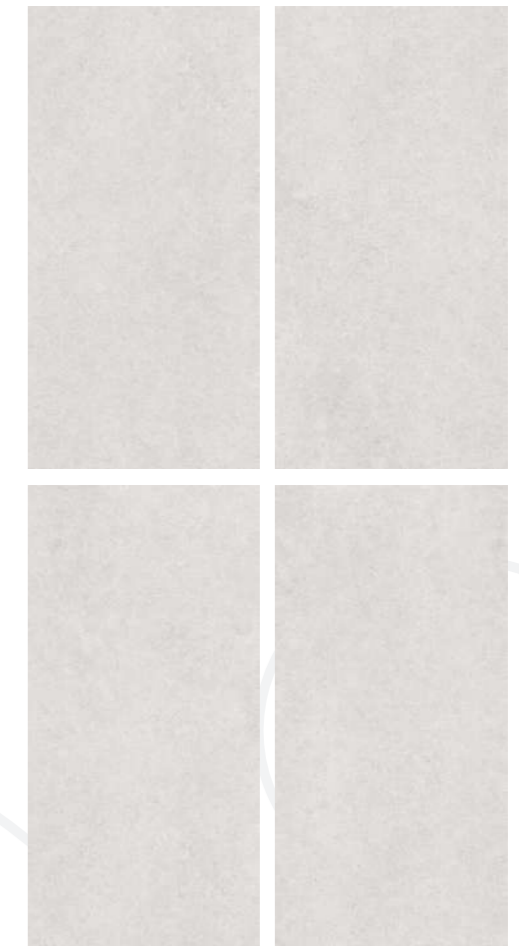

RANDOM- 04

GVT 600X1200MM



BOSTON GREY





CALCE BEIGE



RANDOM- 02



CALCE GREY



RANDOM- 03



GVT 600X1200MM



CALCE BEIGE




CRESTA BEIGE



RANDOM- 03



CRESTA BROWN

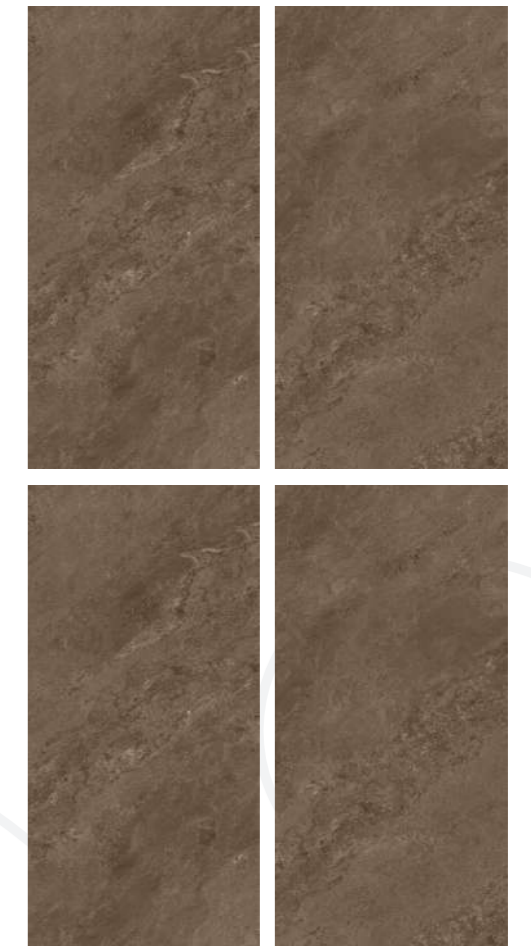

RANDOM- 03



Matt  
SERIES

PROBITY  
Ceramic LLP

GVT 600X1200MM



CRESTA BROWN



CRESTA GRIS



RANDOM- 03



CRESTA SILVER



RANDOM- 03


GVT 600X1200MM



CRESTA GRIS




EVON NATURAL

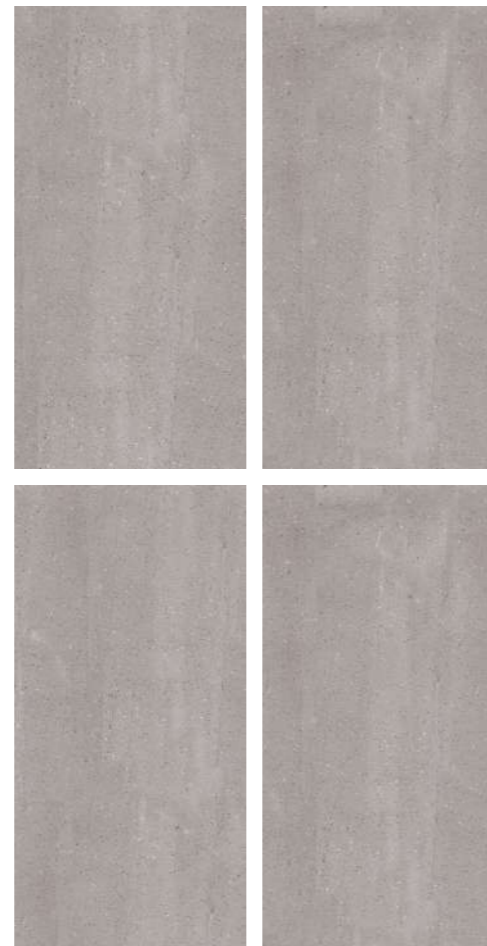

RANDOM- 03



EVON BIANCO

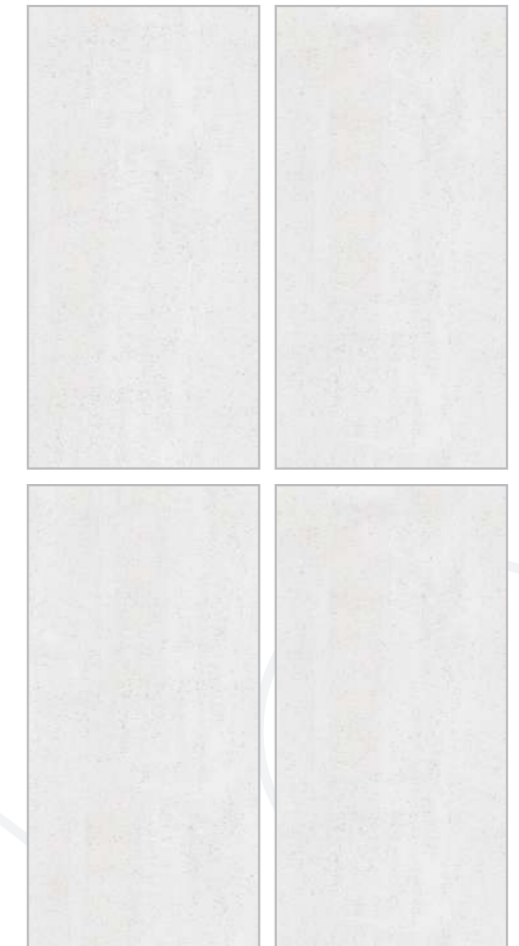

RANDOM- 03



GVT 600X1200MM



EVON GREY







LAVA BEIGE



RANDOM- 03

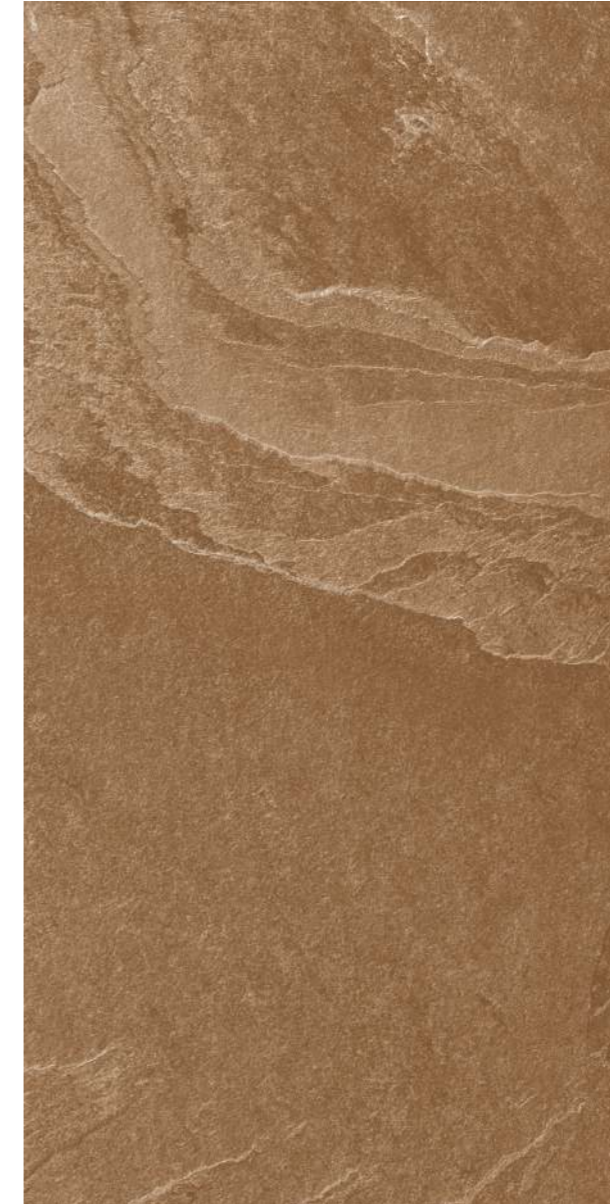

LAVA BROWN

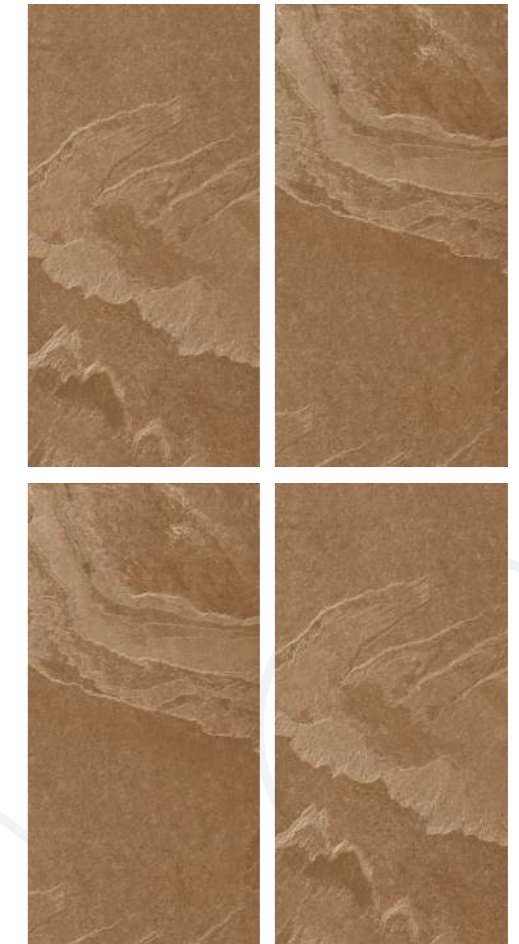

RANDOM- 02




GVT 600X1200MM



LAVA BROWN



LAVA GRIS

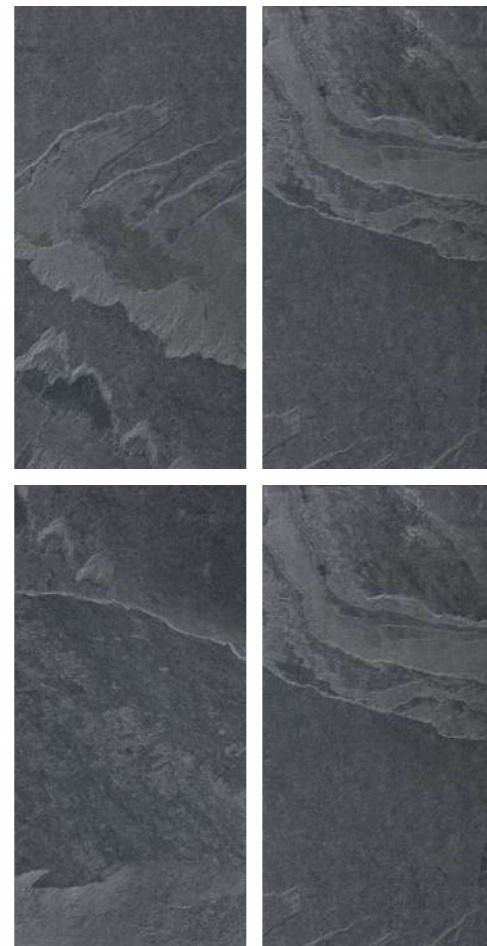

RANDOM- 03



LAVA LIGHT



RANDOM- 03



GVT 600X1200MM



LAVA LIGHT



NURIA BEIGE




RANDOM- 04



NURIA BROWN



RANDOM- 04

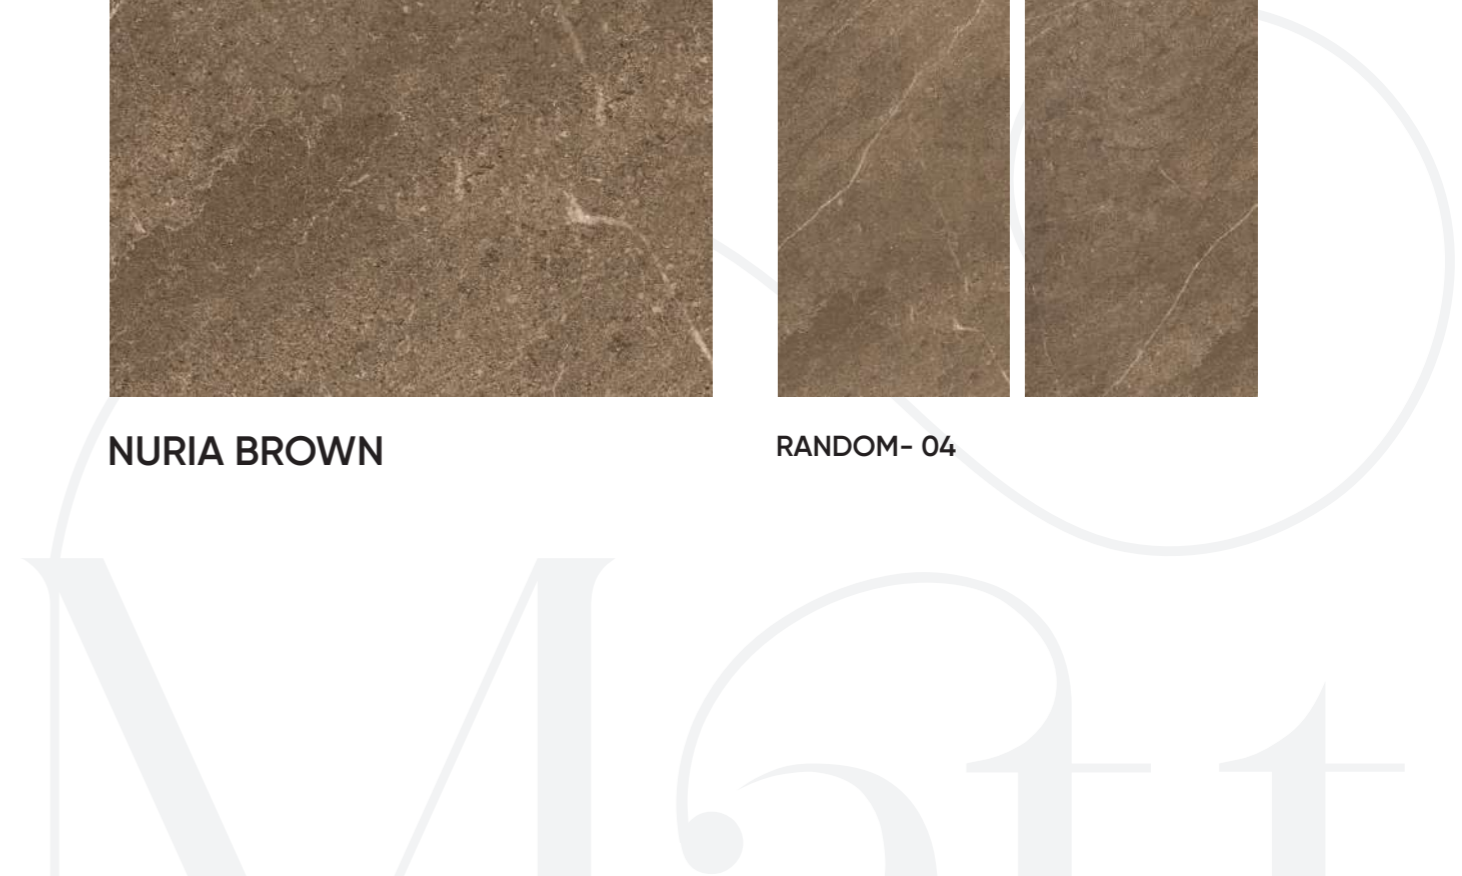


GVT 600X1200MM



NURIA BROWN




SAND BEIGE

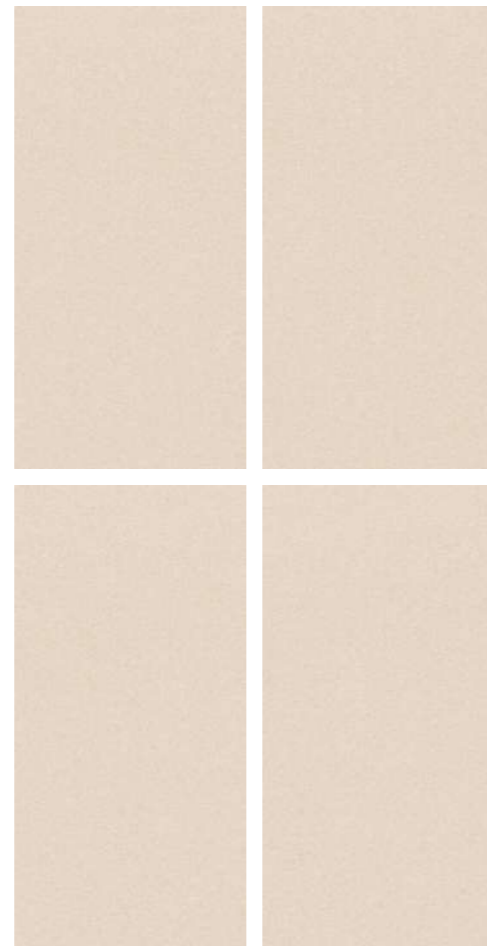

RANDOM- 04



SAND BLANCO

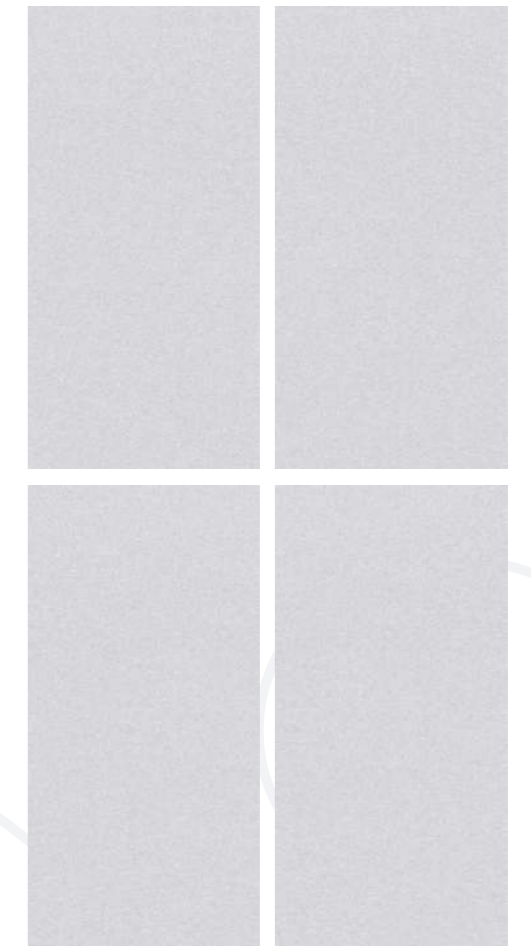

RANDOM- 04



Matt  
SERIES



GVT 600X1200MM




SAND BEIGE







SAND BROWN

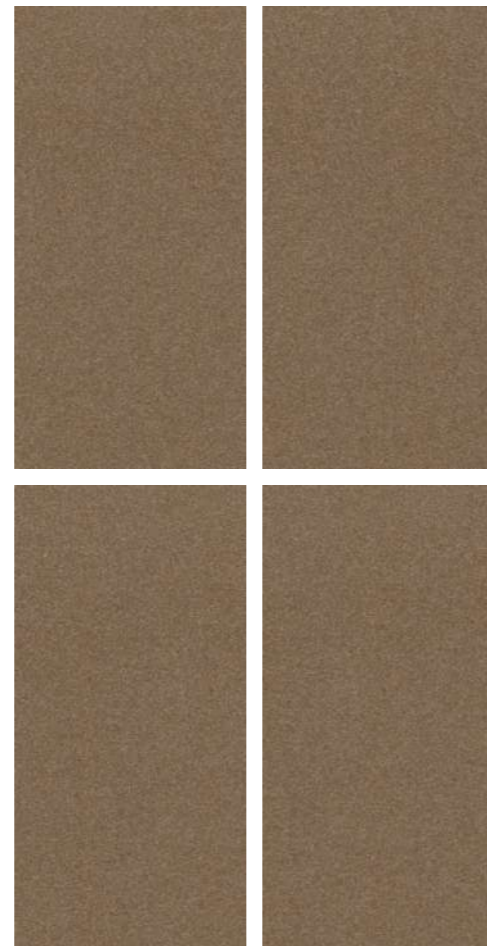

RANDOM- 04

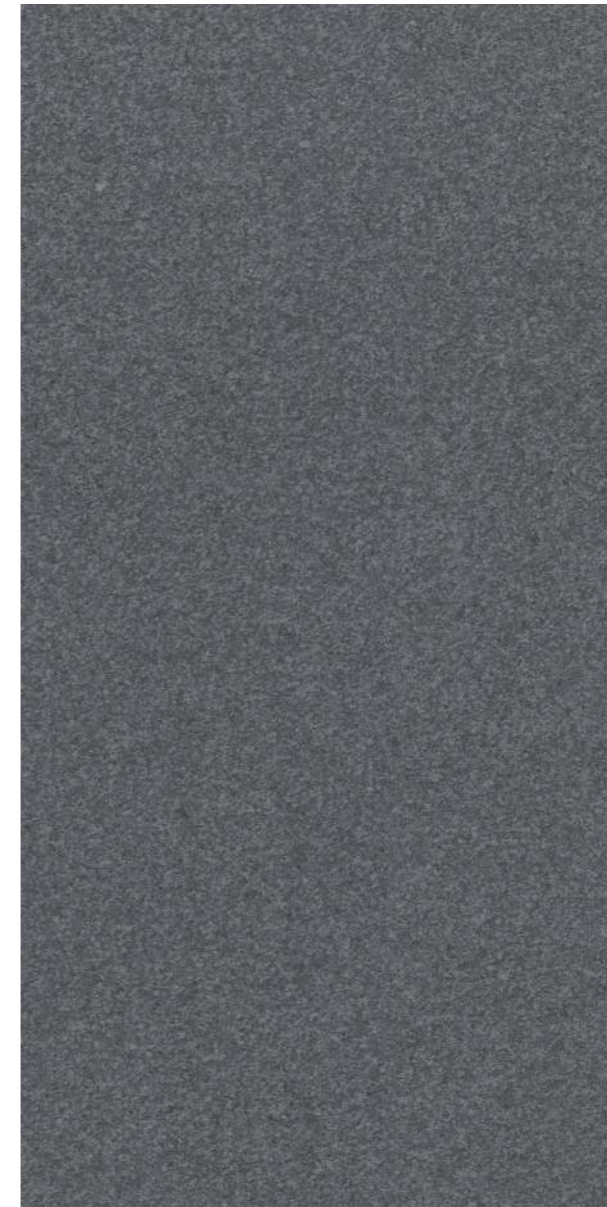

SAND GREY

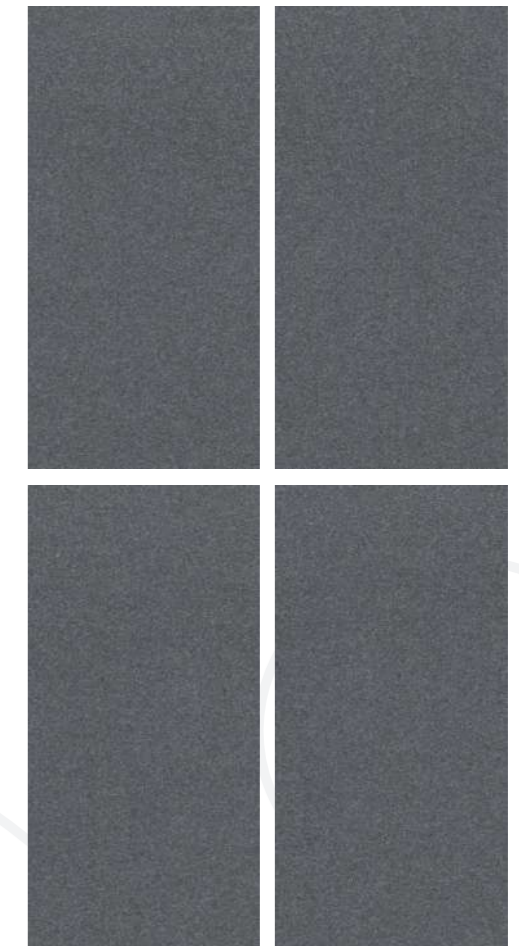

RANDOM- 04



GVT 600X1200MM



SAND GREY



STONEAGE BEIGE



RANDOM- 04



STONEAGE BROWN




RANDOM- 04



GVT 600X1200MM



STONEAGE BROWN

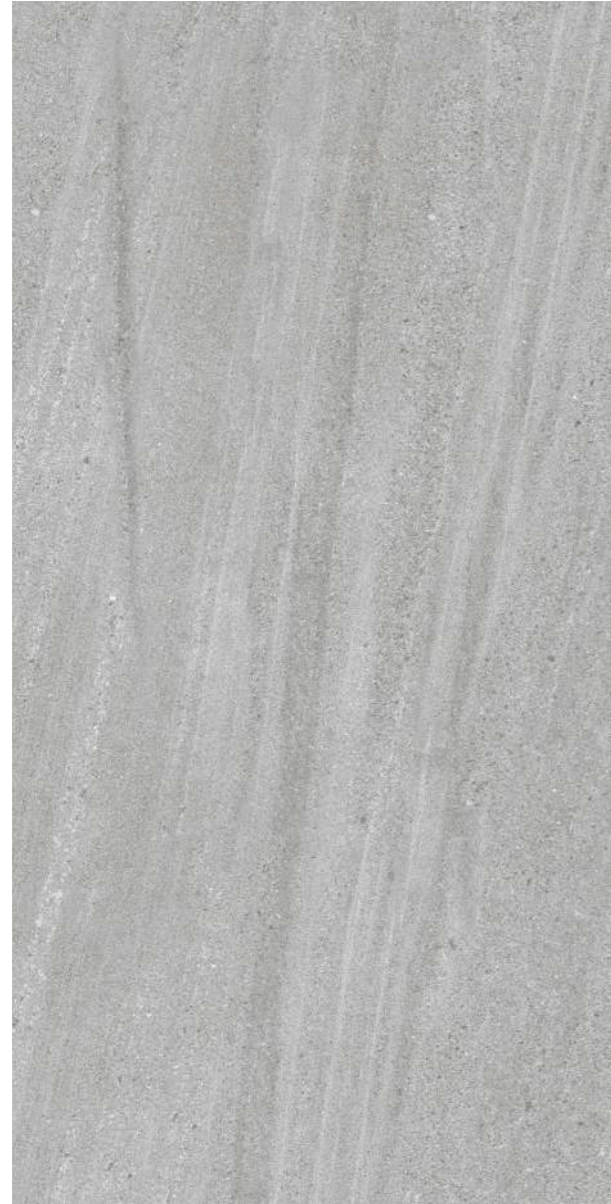

STONEAGE GREY



RANDOM- 03



STONEAGE BIANCO



RANDOM- 04



GVT 600X1200MM



STONEAGE GREY



TUNA ROCK GRIS




RANDOM- 04



TUNA ROCK ICE



RANDOM- 04

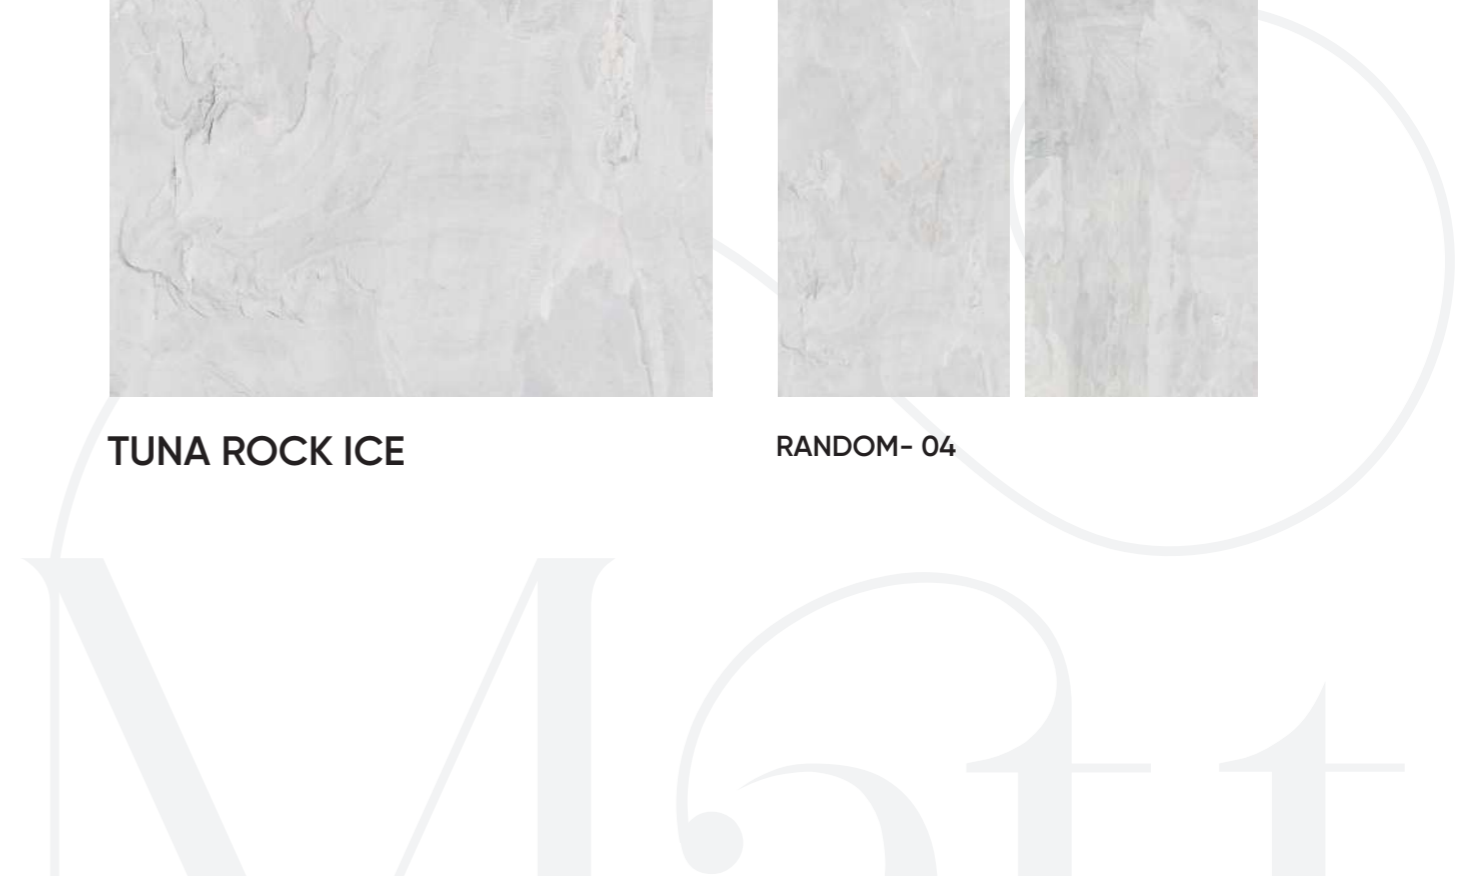

Matt  
SERIES



GVT 600X1200MM



TUNA ROCK GREY






VICTORIA BIANCO



RANDOM- 04



VICTORIO GREY

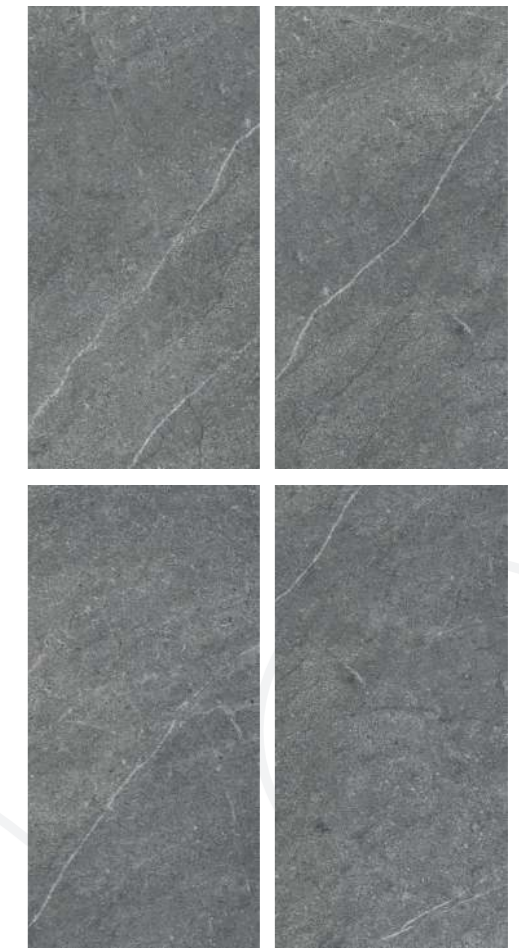

RANDOM- 04



# Technical Specifications.

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN 14411 GROUP Bla	MEAN VALUE OF POLISHED GVT	MEAN VALUE OF GVT / PGVT	TEST METHOD
<b>REGULATORY PROPERTIES</b>				
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER
<b>STRUCTURAL PROPERTIES</b>				
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082
<b>MASSIVE MECHANICAL PROPERTIES</b>				
	Min. 35 N/mm	Min. 40 N/mm <sup>2</sup>	Min. 40 N/mm <sup>2</sup>	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg	Min. 0.55	Min. 0.55	ISO-10545-5
<b>SURFACE MECHANICAL PROPERTIES</b>				
Surface abrasion resistance	As per mfg	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	Min. 5	EN 101
<b>THERMO HYDROMETRIC PROPERTIES</b>				
Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 <sup>-6</sup>	Max. 6.5x10 <sup>-6</sup>	Max. 6.5 x 10 <sup>-6</sup>	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
<b>CHEMICAL PROPERTIES</b>				
Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14
<b>SAFETY PROPERTIES</b>				
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.
Lead & Cadmium given o by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15

## Packing Details.

SR. NO.	PRODUCT	NOMINAL SIZE	TILES PER BOX	COVERAGE AREA	WEIGHT
1	VITRIFIED TILES	600 x 1200 mm	2	1.44 Sq. Mtr.	29 Kg Approx..

**Note:** •Colour Shown are as accurate as the limitations of the printing process will allow. •Prospective customers are advised to inspect a sample of the tile before ordering. •Every effort has been made to ensure the accuracy of the information given. •However, the company reserve the right to change the specifications without prior notice. •Sometime variations in shade or size being inherent to ceramic industry may occur. •Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

## Applications.



DISCLAIMER : We reserves the right to delete & amend either totally of partially, and of the colours, shapes, size, references and other technical specification contain in catalogue at any time. the colours shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample final selection. The details of colours, size, references should be vitrified for Typographical errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLIANT SHALL BE SHALL ENTERTAINED ON TILES ALREADY LAID/FIXED.